


REGULADORAS DE PRESION

POLMAC

Constru das en Nylon R.F.V. de excelente resistencia qu mica y mec nica
Tornillos galvanizados

Tipo "G"


Con resorte, para mantener constante la presi n de trabajo

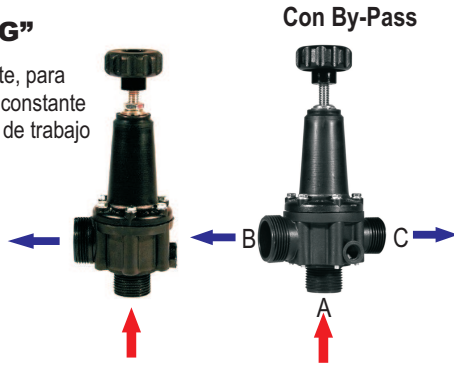

C�digo	Modelo	L/min	A	B	C
8438893	G 1" - 15 bar	200	1"	1 1/4"	-
8438888	G 1" - 25 bar	200	1"	1 1/4"	-
8438889	G 1" - 15 bar c/ BY-PASS	200	1 1/4"	1"	1 1/4"
8438892	G 1 1/2" - 15 bar c/ BY-PASS	350	1 1/4"	1 1/2"	2"
8438890	G 1 1/2" - 20 bar c/ BY-PASS	400	1 1/2"	1 1/2"	2"
8438899	G 2" - 10 bar c/ BY-PASS	600	2"	2"	2"

Tipo "V"

VOLUMETRICA
Sin resorte.
Adecua la dosis en forma proporcional a las rpm del motor



C�digo	Modelo	L/min	A	B	C
8438887	V 1" - 25 bar	200	1"	1 1/4"	-
8438898	V 1" - 25 bar	200	1 1/4"	1"	1 1/4"
8438891	V 1 1/2" - 20 bar	400	1 1/2"	1 1/2"	2"